


## Truck Mounted Placing Boom

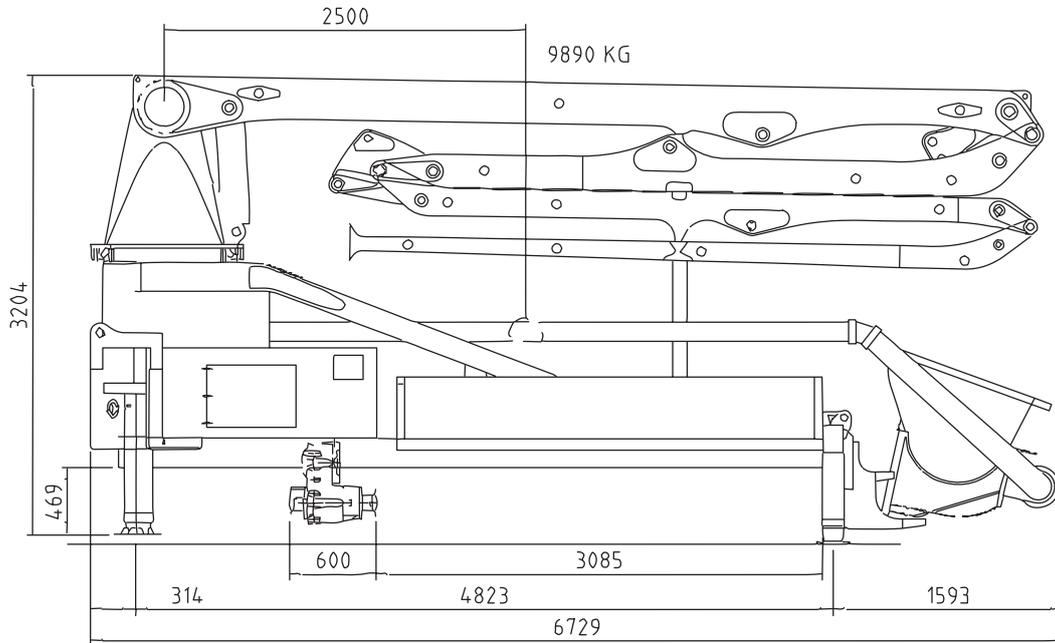

### BOOM SPECIFICATIONS

Vertical reach	23.2M
Horizontal reach	19.8M
Reach from front of truck	17.3M
Unfolding height	5.4M
Section articulation	94°/180°/260°/250°
Rotation	370°
Delivery line	125mm
Proportional boom	Yes
End hose length	3M
Outrigger spread-front	5.6M
Outrigger spread-rear	2.65M
Max. outrigger weight	11,000kg

### PUMP SPECIFICATIONS

Maximum output	90m/h
Concrete cylinder	Ø230 x 1400
Stroke per minute	28
Concrete pressure	69 bar
Hopper capacity	0.6m
S-tube	Ø200 x Ø180
Hydraulic pump	KCP-K3V200S
Cycling system	Hydraulic w/ manual overrides
Max. aggregate size	40mm

### WORKING DIAGRAM

