


PUMP SPECIFICATIONS

Engine RPM	1550 rpm
Maximum output	80/h(High)/120/h(low)
Main cylinder	Ø140/Ø80 x 2100mm
Concrete cylinder	Ø230 x 2100mm
Cycling system	Hydraulic with manual overrides
Stroke per minute	16(High)/23(low)
Concrete pressure	130 bar(High)/88 bar(low)
Hopper capacity	0.6m ³
S-tube	Ø200 x Ø150
Hydraulic pump	Rexroth-A11VLO260
Max. aggregate size	40mm
Water tank volume	450L
Horizontal distance	420M
Vertical distance	145M
Outrigger	Hydraulic vertical ext.

PERFORMANCE DIAGRAM

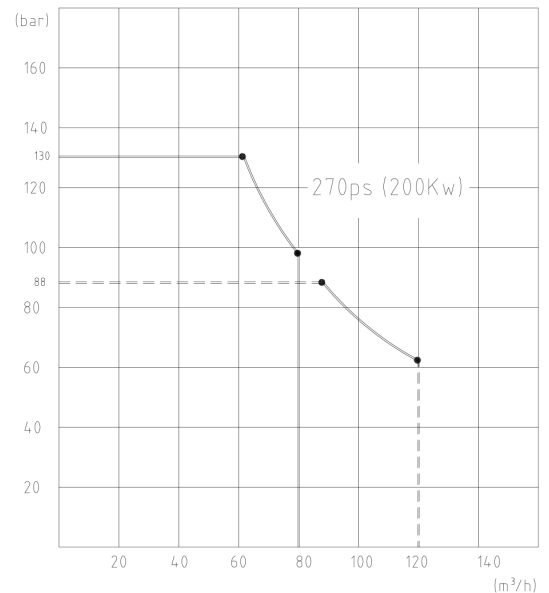

- Maximum theoretical values listed
- Photos and drawings are for illustration purpose only
- Dimensions will vary with different truck makers, models and specifications
- Right to make technical amendments reserved

— HEAD SIDE
- - - - - ROD SIDE