


PUMP SPECIFICATIONS

Engine RPM	1550 rpm
Maximum output	44m ³ /h(Head)/66m ³ /h(Rod)
Main cylinder	Ø130/Ø80 x 1800mm
Concrete cylinder	Ø200 x 1800mm
Cycling system	Hydraulic with manual overrides
Stroke per minute	13(Head)/19(Rod)
Concrete pressure	171 bar(Head)/115 bar(Rod)
Hopper capacity	0.6m ³
S-tube	Ø200 x Ø180
Hydraulic pump	KCP-K3V180S
Max. aggregate size	40mm
Water tank volumn	450L
Horizontal distance	550M
Vertical distance	200M
Outrigger	Hydraulic vertical ext.

PERFORMANCE DIAGRAM

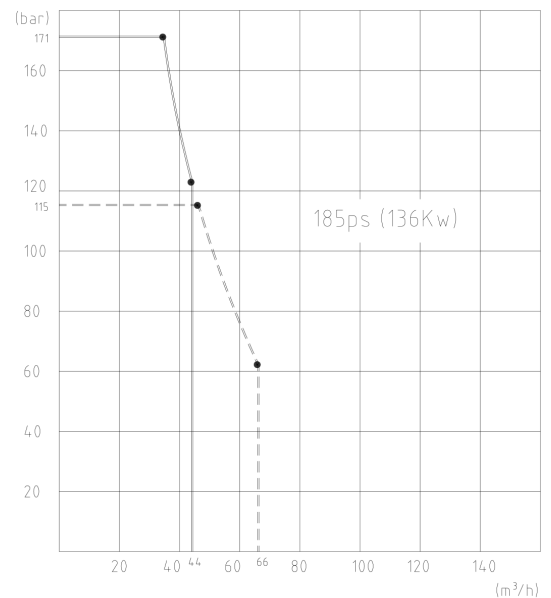

- Maximum theoretical values listed
- Photos and drawings are for illustration purpose only
- Dimensions will vary with different truck makers, models and specifications
- Right to make technical amendments reserved

———— HEAD SIDE
 - - - - - ROD SIDE